


# R-110SW

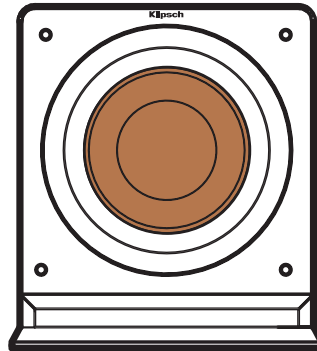

## SPUN COPPER FRONT-FIRING CERAMETALLIC WOOFERS

Cerametallic woofers are exceptionally light while being extremely rigid - providing remarkable low frequency response, with minimal cone breakup and distortion.

## ALL-DIGITAL AMPLIFIER

The built-in all-digital amplifier delivers ample power with high efficiency and true-to-source accuracy in reproduction.

## FRONT-FIRING SLOT PORT WITH EXCLUSIVE INTERNAL FLAIR TECHNOLOGY

Proprietary internal geometry that minimizes port noise for clean undistorted low frequencies. The front-firing design allows for placement flexibility.

## LOW PASS CROSSOVER AND VARIABLE PHASE CONTROL

Allows you to tune the subwoofer to your Klipsch speakers and to your room, establishing the ideal level of bass.

## LINE LEVEL / LFE RCA INPUTS

Ensure compatibility with old and new receivers.

## WA-2 WIRELESS SUBWOOFER KIT CAPABLE

Allows for completely wireless connection of one or multiple subwoofers for easy placement anywhere in your room.

## MDF CABINETS WITH BRUSHED POLYMER VENEER FINISH

Contemporary aesthetic with absolute durability that results in a seamless integration into any décor.

## FRONT-MOUNTED LED POWER INDICATOR

Easy to ready, elegant power indication.

## 1/2 WATT STANDBY MODE

Exceptional efficiency on or off.

## MDF PLINTH

Incredible acoustic decoupling feature that allows you to hear the subwoofer, not the room.

## STRONG, FLEXIBLE, REMOVABLE GRILLE

This woven cloth material adds a rich, refined look that is acoustically transparent.

## SPECIFICATIONS

FREQUENCY RESPONSE	27Hz - 125Hz
MAXIMUM ACOUSTIC OUTPUT	114dB
AMPLIFIER	All digital
AMPLIFIER POWER	200W / 400W
DRIVE COMPONENTS	10" (25.4 cm) long-throw copper spun cerametallic, front-firing woofer
ENCLOSURE MATERIAL	MDF
ENCLOSURE TYPE	Bass Reflex
INPUTS	L/R line-level/LFE RCA jacks, Wireless WA-2 Port
HEIGHT	16.3" / 41.4 cm
WIDTH	14.75" / 37.37 cm
DEPTH	15.8" / 40.13 cm
WEIGHT	39.25 lbs / 17.8 kg
FINISH	Brushed Black Polymer Veneer
BUILT FROM	2014
FEATURES	Gain, Lowpass, Phase, Auto Power
PHASE	Switchable 0-180 degrees