

MAESTRO


Quantum



Subject to modifications and errors, picture similar to product

No matter how you listen to your music, our MAESTRO Quantum can cater to your personal and individual needs. Iconic design, extensive features and connections, a focus on user-friendliness and outstanding sound. CD player, FM, digital and Internet radio, as well as streaming services guarantee a versatile music experience. It is

operated directly on the device, via the remote control or via the sonoro app. All this brought into a compact format with a great deal of passion and expertise and assembled from the best components. SOUND. DESIGNED




sonoro

GERMAN AUDIO DESIGN
www.sonoro.com

MAESTRO Quantum

DESIGN

Hand-polished wooden casing with high-quality finish with lacquer. Aluminum front made from one piece with floating optic. Designed and developed in Germany.

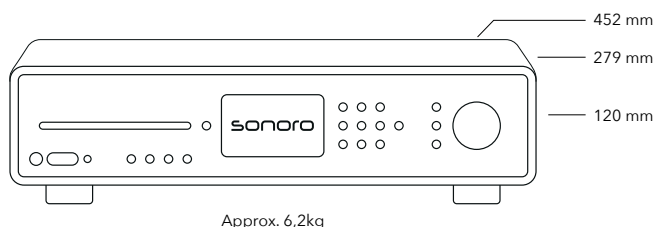

Approx. 6,2kg

White (matte)
Silver

Black (glossy)
Silver

Black (matte)
Black

PRODUCT HIGHLIGHTS

- 4-inch big display with optimised contrast
- New intuitive user interface
- Control via the sonoro audio app
- Highly efficient Hypex amplifiers
- ESS Technology SABRE Digital-to-Analogue Converters (DACs)
- DIRAC Live (licence included - up to 500 Hertz)
- Room correction to minimise room modes (optional measuring microphone required)
- Adaptive Loudness function (for optimal tonal balance)
- Optimal equalizer presets for sonoro loudspeakers + Dynamic Bass function (for optimised bass reproduction)
- Apple AirPlay*, Google Cast*
- Roon Ready (subscription required) for a cross-source music library
- Numerous connection options (e.g. HDMI (ARC), USB-C, stereo pre out, line out, phono, etc.)
- Smart Home Ready (Busch-Jaeger, Jung, Gira)



roon
READY



Bluetooth®

Qualcomm®
aptX™ HD

digitalradio
DAB+ DAB FM certified

HDMI™
HIGH SPEED WITH HDCP 2.0

Works with
Apple AirPlay

works with
Google Cast

BUSCH-JAEGER

GIRA

JUNG

TECHNICAL SPECIFICATIONS

Sound	Highly efficient Class-D Hypex amplifiers 2 x 180 watts at 4 Ω / 2 x 110 watts at 8 Ω @ 0.1 % THD Operation of external loudspeakers with an impedance from 4 to 16 Ω Bass, treble & balance adjustment Adaptive loudness function as well as other modes, such as 2.1 systems with high-pass filter Optimal equalizer presets for sonoro speakers + Dynamic Bass function (for optimised bass reproduction) Dirac Live room correction App
4" TFT colour display	High resolution; graphic & automatic brightness adjustment
Encryption	WEP, WPA2 (PSK), WPA3, WPS
Network	WLAN: IEEE 802.11 a/b/g/n/ac/ax, 2,4/5 GHz LAN network connection
Stations search	Automatic & manual
Sleep-timer	5 - 120 min. (adjustable in 5-minute intervals)
Stations buttons	A total of 99 local favourite storage locations for all music sources (additional storage options e.g. with streaming + internet radio providers possible).
Operation	With the remote control Control via the sonoro audio app Directly on the product Smart Home Ready

Power connection	Built-in power supply (AC 220-240V ~ 50/60Hz) with power switch Mains cable with phase marking
Music streaming	FM & DAB+ digital radio, internet radio Podcast Slot-in CD-player (CD, CD-R, CD-RW, MP3-CD, WMA) with repeat and shuffle function Bluetooth® (A2DP, AVRCP) Qualcomm aptX™ Bluetooth® audio-technology Bi-directional Bluetooth® connection for Bluetooth® wireless headset Apple AirPlay*, Google Cast* Spotify Connect™*, TIDAL Connect™*, Amazon Music HD™*, Qobuz Connect™*, Deezer™* DLNA, UPnP Phono preamplifier for MM cartridges
Input/Output	HDMI (ARC) USB-A, USB-C (charging and playback function) Aux-In (3.5 mm jack) Gold-plated Aux-In (Cinch input) Stereo Pre-Out, Line-Out Gold-plated phono input (for MM cartridges) 1x digital optical and 1x coaxial input Headphone jack (3.5 mm jack) Gold-plated loudspeaker screw connections

*Some content is unavailable in certain regions due to licensing restrictions

sonoro

GERMAN AUDIO DESIGN
www.sonoro.com